



Bringing water to life.

Flopro Professional Metal Hose Reel Instructions

Hose reel can be used freestanding or wall mounted.

To get started:

Remove handle and all attachments from inside the drum

Using the allen key and screw provided, attach the handle to the outside of the drum and tighten

Screw the female tap adaptor onto the outside of the drum

Attach a hose connector to the hose pipe you would like to wind onto the reel

Click the hose connector onto the male outlet inside the reel – make sure this outlet is fully tightened

Wind on the hose pipe

Add a water stop hose connector and either a Nozzle or Spray gun to the end of your Hose pipe

Attach a leader hose from your reel to your tap

Place on the ground to begin use


Attaching the reel to the wall:

Please ensure the reel is positioned close to the tap, to a maximum suggested distance of 1 metre.

You will require: Drill, Screwdriver, Spirit level

- 1) Using the bracket as a template and the spirit level to ensure the bracket is straight, mark the wall through the bracket. For best results, the brackets need to be positioned at either end of the top pole
- 2) Drill the wall in the two identified positions
- 3) Insert the wall plugs provided
- 4) Place the brackets onto the wall and fix in place using the screws provided
- 5) Using the allen key provided, loosen & remove the screws at either side of the top frame and remove the pole. Pull the 2 x black grips onto the pole and position at either end. These grips will help to protect the pole and provide grip for the wall bracket
- 6) Insert the pole back onto the reel frame and tighten the screws
- 7) Place the reel onto the wall, positioning the rubber grips on the pole into the brackets
- 8) Insert the bracket handle screws and tighten
- 9) Wind on the hose pipe

Freestanding:

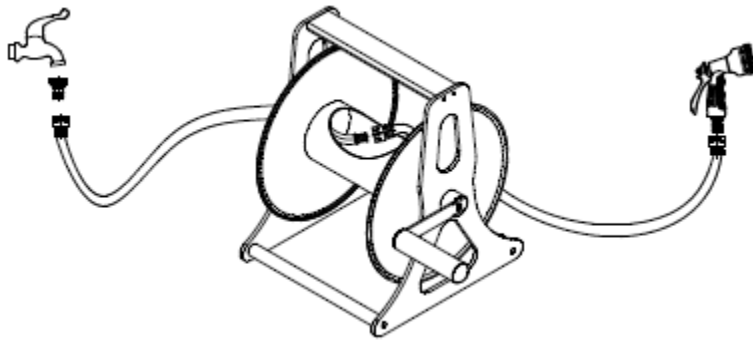

Wall Mounted:

